



I2MO Essentielle Technical sheet

Manual cantilever workshop mini crane

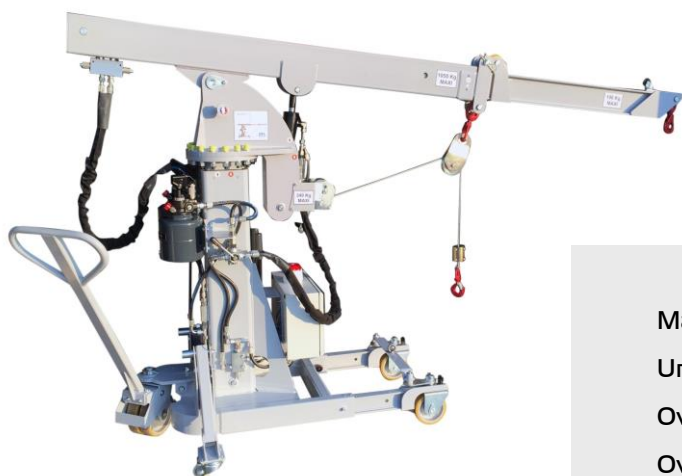

Technical characteristics



Maximal load	1000 kg
Unladen weight	550 kg
Overall length (brake locked)	1,85 m
Overall width without stabilizers	0,60 m
Overall width with stabilizers	1,01 m
2 dual rear wheels PU* 95 Shore	Ø 200x50 mm
2 front wheels PU* 95° shore	Ø 150x50 mm
2 swivel front wheels on the stabilizers	Ø 65x40 mm

Standard equipment

- 2 double-action manual hydraulic pump with steel tank
- 6 way deflect valve (mast or angling cylinder)
- Hydraulic telescopic jib (double action cylinder)
- Hydraulic vertical mast with 600 mm stroke
(double action cylinder)
- Jib angling hydraulic cylinder (double action cylinder)
- 2 fold-up stabilizers with swivel wheels
- Anti-tipping device
- Automatic brake

Options

- Additional jib length 1 meter SWL** 190 kg
- Self-locking manual winch SWL maxi 500 kg with security chest (sound and lighting alarm + battery + charger)
- Manuel variable wheelbase stroke 210 mm with lifting jack
- Swivel front wheels

*PU: Non-marking polyurethane

**SWL: Safe Working Load

12MO Essentielle Technical sheet

Manual cantilever workshop mini crane

